

## X1-5500 Clear

### Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

### Product Description

Endura X1-5500 Clear is a three component, highly cross-linked, high performance, polyurethane clear coating designed to give extra protection to solid, metallic and pearl colors.

#### Product features:

- Exceptionally high gloss
- Other gloss levels available: Medium, Low and No gloss
- Excellent protection against acids and alkalis
- Exceptional ultraviolet light protection
- Exceptional abrasion resistance
- Available with PTFE/Teflon™ for additional protection
- Skydrol® protection

### Recommended Uses

X1-5500 Clear was created to meet the unique needs of aircraft. It is suitable for protecting most finished surfaces including solid colors, metallic and pearl colors.

### Mix Ratio

2 part by volume of X1-5500	Component A	[XCA05500]
1 part by volume of X1-1000	Component B	[XUB01000]
1 part by volume of Converter	Component C	[XUCXXXXX]

Available Converters - Standard	Product Code
X1-2230 FAST CONVERTER	XUC02230
X1-2220 MED CONVERTER	XUC02220
X1-2210 SLOW CONVERTER	XUC02210

Available Converters - Low VOC	Product Code
X1-1230 LOW VOC FAST CONVERTER	XUC01230
X1-1220 LOW VOC MED CONVERTER	XUC01220
X1-1210 LOW VOC SLOW CONVERTER	XUC01210

#### Temperature range recommendations for converter use:

Temperature Range	40°F - 59°F (5°F - 15°C)	59°F - 77°F (15°C - 25°C)	77°F - 104°F (25° - C40°C)
Converter	Fast	Medium	Slow
Reducer (optional)	Fast	Medium	Slow
Aerocat I or II	Optional	Optional	Optional

**Note: Optimal finish is obtained when product and object are 70-77°F (20-25°C) and RH of 50%.**

## X1-5500 Clear

Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

### Product Characteristics

<b>Gloss: ASTM D2457</b>	High: 90+ GU at 60°
<b>Other gloss levels available</b>	
<b>Volume Solids Mixed:(Unreduced)</b>	38% ± 1%
<b>Pot Life:</b> (77°F (25°C) and 50% RH)	8-10 Hours
<b>Note: This will vary depending on converter used and addition of Aerocat I or II</b>	
<b>VOC Mixed (Unreduced): EPA Method 24: Typical</b>	340 g/l 2.8lb /gal
<b>VOC content will vary with each converter used. Contact your Endura Aviation Representative for exact VOC of color/converter combinations</b>	
<b>Shelf Life:</b>	
<b>Component A</b>	3 years
<b>Component B</b>	2 years
<b>Component C</b>	5 years
<b>Reducers</b>	10 years
<b>For unopened product (77°F (25°C))</b>	

### Surface Preparation

X1-5500 Clear can be applied on X1-7500 Topcoat colors without sanding during their topcoat window.

Ensure that surfaces to be clear coated are free of flaws, surface contaminants and other surface imperfections.

If the X1-7500 topcoat surface has been allowed to cure longer than 24 hours, sanding will be required to achieve inter-coat adhesion. Sand the topcoat lightly with 600 grit sandpaper or Scotch-Brite™ Gray scuff pad.

**Note:**

- **Do not sand Metallic or Pearl colors.**
- **Do not mix X1-5500 with metallic or pearl color for final coat.**
- **Do not mix clear into final color coat on solid colors.** This may cause matching and repeatability issues. Ensure opacity is achieved in previous coat.

## X1-5500 Clear

Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

### Application

X1-5500 Clear can be applied using most spray painting systems.

Apply X1-5500 Clear as soon as the topcoat surface has cured enough to wipe with a tack cloth.

Apply 2-3 wet coats at 2.0- 3.0 mils (wet). Allow 15 – 20 minute flash off between coats.


Be aware when more than three coats of paint are applied in a given 12-hour shift (including primer, topcoats and clear coat). If more than 3 coats have been applied, 10-12 hours is recommended to pass to allow for proper solvent evaporation.

**Note:** After 24 hours, X1-5500 Clear must be sanded to achieve inter-coat adhesion if recoating.

### Spray Gun Setup

Feed Type	Fluid Tip	Application Pressures (heel of gun)	Fluid Delivery
Siphon Feed	1.6-1.8 mm	40-50 psi	
Gravity Feed	1.3 - 1.4 mm	30-40 psi	
Pressure Feed	1.0-1.4 mm	55-65 psi	12-14 oz/min
Air Assist Airless	9-13 thou	1000-1800 psi	
Airless	9-13 thou	1000-3000 psi	

### Spraying Viscosity

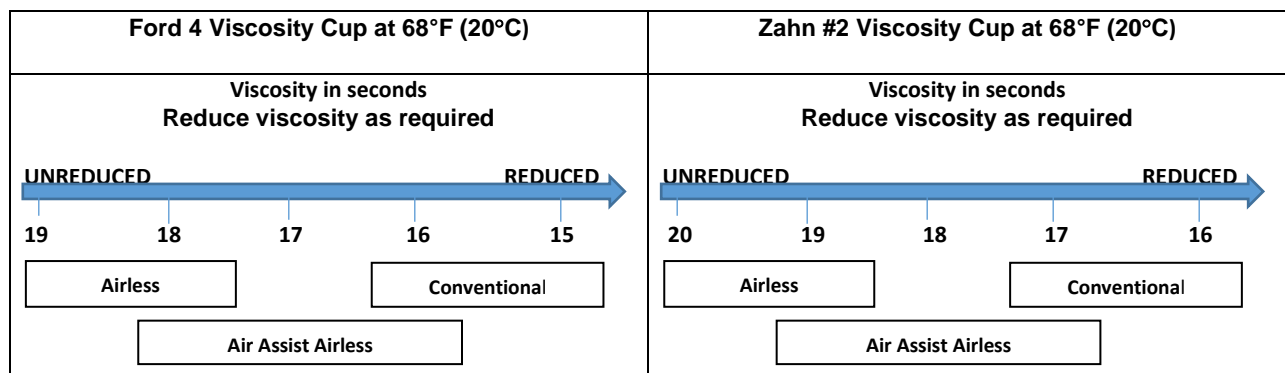

**Note:** The above target viscosities are suggested as a starting point and can be adjusted depending on desired finish. Spraying viscosity and thinning will depend on ambient conditions, spray equipment used.



Endura Manufacturing Co. Ltd.  
 12425 149 Street NW  
 Edmonton, Alberta, Canada T5L 2J6  
 Phone: +1-780-451-4242 / 1-800-661-9930  
[www.EnduraAviation.com](http://www.EnduraAviation.com)

# X1-5500 Clear

## Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

If required, recommended spraying viscosity is achieved by reducing with one of the desired Endura Aviation topcoat thinners/ reducers.

Standard		Low VOC	
X1-3030 FAST REDUCER	[XUR03030]	X1-2030 LOW VOC FAST REDUCER	[XUR02030]
X1-3020 MED REDUCER	[XUR03020]	X1-2020 LOW VOC MED REDUCER	[XUR02030]
X1-3010 SLOW REDUCER	[XUR03010]	X1-2010 LOW VOC SLOW REDUCER	[XUR02030]

## Film Build

Endura X1-5500 Clear has a recommended film build thickness of:

<b>Wet: WFT Unreduced</b>	<b>2.5 – 5.5 mils</b>	<b>63 – 140 microns</b>
<b>Dry: DFT</b>	<b>1.0 – 2.0 mils</b>	<b>25 – 50 microns</b>

Theoretical coverage at 1.0 mil (25 microns)

**Average DFT:** 610 ft<sup>2</sup> per gallon at 100% transfer efficiency.

## Dry Times

	X1-1230 C Low VOC Fast Converter XUC01230 77°F (25°C) and 50% RH	X1-2230 C Fast Converter XUC02230 77°F (25°C) and 50% RH
<b>Gel Time/Pot Life</b>	<b>8 Hours</b>	<b>8 Hours</b>
<b>Cure to Touch</b>	<b>2.5 Hours</b> [30 mins.]	<b>3 Hours</b> [30 mins.]
<b>Cure to Handle</b>	<b>6.5 Hours</b> [1 hour]	<b>7.5 Hours</b> [1 hour]
<b>Full Cure</b>	<b>7-14 Days</b>	<b>7-14 Days</b>

	X1-1220 C Low VOC Medium Converter XUC01220 77°F (25°C) and 50% RH	X1-2220 C Medium Converter XUC02220 77°F (25°C) and 50% RH
<b>Gel Time/Pot Life</b>	<b>12 hours</b>	<b>12 hours</b>
<b>Cure to Touch</b>	<b>6 hours</b> [1 hour]	<b>5 Hours</b> [1 hour]
<b>Cure to Handle</b>	<b>10.5 hours</b> [2 hours]	<b>9.5 Hours</b> [2 hours]
<b>Full Cure</b>	<b>7-14 Days</b>	<b>7-14 Days</b>

## X1-5500 Clear

Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

	X1-1210 C Low VOC Slow Converter XUC01210 77°F (25°C) and 50% RH	X1-2210 C Slow Converter XUC02210 77°F (25°C) and 50% RH
Gel Time/Pot Life	17 Hours	17 Hours
Cure to Touch	8.5 hours [1.5 hours]	7.5 hours [1.5 hours]
Cure to Handle	13 hours [3 hours]	15 hours [3 hours]
Full Cure	7-14 Days	7-14 Days

**Important note: The use of AeroCat I or II will accelerate drying times. [Time] indicates approximate minimum time achievable when the maximum recommended amount of AeroCat I or II is added.**

See the AeroCat I or II TDS for more information.

**Note: Dry Times are subject to ambient conditions (temperature and humidity), good airflow and film build of the topcoat.**

### Clean Up

Clean all equipment immediately after use with Endura High Strength Gun Wash or Endura X1 Reducers. Follow manufacturer's safety recommendations when using any solvent.

### Ordering Information (sizing)

X1-5500 Topcoat is available in the following spray able sizes: 2 quarts, 1gallon, 4 gallons Kits

2 Mixed Quarts		
Comp A X1-5500	XCA05500-020	1 Qt.
Comp B X1-1000	XUB01000-010	1 Pt.
Comp C Part number varies with converter	XUCXXXX-010	1 Pt.

1 Mixed Gallon		
Comp A X1-5500	XCA05500-020	2 Qts.
Comp B X1-1000	XUB01000-020	1 Qt.
Comp C Part number varies with converter	XUCXXXX-020	1 Qt.

## X1-5500 Clear

Technical Data Sheet (TDS)

Conforms to: (MIL-PRF-85285 TYPE 1 and TYPE 2 CLASS H)

4 Mixed Gallons		
Comp A X1-5500	XCA05500-030	2 Gals.
Comp B X1-1000	XUB01000-030	1 Gal.
Comp C Part number varies with converter	XUCXXXX-030	1 Gal.

### Environmental Conditions

For optimum coating performance product, substrate and ambient temperature should be between 68°F-77°F (20°C-25°C). To prevent condensation during application the surface temperature must be 5°F (3°C) or more above the dew point at all times.

**Note: For use outside this range please contact your Endura Aviation Representative.**

### Specifications

CHARACTERISTIC	TEST	RESULT
Hardness	ASTM D3363	4H
Solvent Resistance	ASTM D4752	100 MEK rubs, NO failure
Impact resistance	ASTM D2794	100 in. lbs; NO failure
Taber Abrasion	ASTM D4060	25 mg loss
Flexibility	ASTM D522	1/8" mandrel bend: NO failure
Service Temperature	-40°F to 360°F	-40°C to 182°C

### Safety Precautions

Please refer to all Safety Data Sheets (SDS) before using this product. SDS sheets can be found on our website at [www.EnduraAviation.com](http://www.EnduraAviation.com).